

AutoScroller



Features:

- I Material: aluminum
- I Stylish curved base with chrome end caps
- I The gradual rotation of the message captures peoples' attention.
- I New motor runs continuously 24 hours for 20 days; motor set in roller to ensure no shifting of graphics during rotation.
- I This stand includes a universal plug and a 12V low-voltage UL/CE transformer to ensure safety and compliance.
- I Protective hard carrying case with shoulder strap.



Includes:

- I Aluminum base
- I One top graphic hanger
- I Two tri-fold poles
- I One 12V motor & transformer 110V AC
- I Hard grey carrying case with shoulder strap
- I Individual cardboard shipping box



Top Graphic Bar



Motor in roller



Hard case

The information in this brochure is subject to change without notice. Any questions, please contact Drytac at info@drytac.com,

5383 Glen Alden Drive, Richmond, Virginia 23231, USA. Toll Free Phone 800-280-6013 Phone 804-222-3094 Toll Free Fax 800-622-8839

www.drytac.com

AutoScroller



Specification: AutoScroller (Silver)

Item#	Graphic visible area	Graphic printing size	Net W.	Packing	Dimension per outer Ctn.	G.W. per Ctn.
SDAS-085	30.5" w x 76.77" h 775 mm x 1950 mm	30.5" w x 160" h 775mm x 4070 mm	11.0 lbs 5 kg	4 pcs/ctn	39.4"x 11"x 23.6" 1000x280 x600 mm	77.2 lbs 35 kg

Artwork Guidelines:


Total Graphic visible area:

30.5" x 76.77"

(775 mm x 1950 mm)

Graphic Layout:

Graphic printing length: 160". Add 0.5" – 1.5" bleed to the end of the graphic and overlap the ends if you use fabric or other supple media.

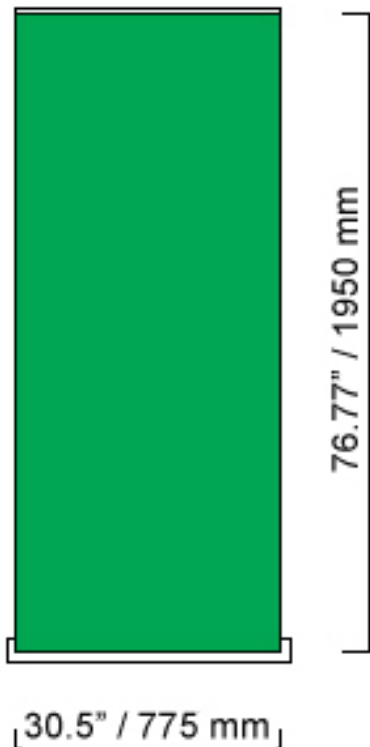

The information in this brochure is subject to change without notice. Any questions, please contact Drytac at info@drytac.com.

5383 Glen Alden Drive, Richmond, Virginia 23231, USA. Toll Free Phone 800-280-6013 Phone 804-222-3094 Toll Free Fax 800-622-8839

www.drytac.com

Installation Instructions --- Autoscroller (SDAS-085)



Step 1: Set the base on the ground.



Step 2: Insert two poles. Make sure they fit in pole base completely.



Step 3: Remove the narrow top graphic roller from the top bar.



Step 4: Slide the graphic onto the top graphic roller.



Step 5: Insert the top graphic roller into the top graphic bar. Make sure the roller fits snugly.



Step 6: Insert the top bar onto the poles.



Step 7: Take out the bottom graphic roller from the base.



Step 8: Slide the graphic onto the bottom graphic roller.



Step 9: Attach the bottom graphic roller to the base and make sure the motor end is located in the right metal slot



Step 10: Switch on the electricity. The installation is now complete

The information in this brochure is subject to change without notice. Any questions, please contact Drytac at info@drytac.com, 5383 Glen Alden Drive, Richmond, Virginia 23231, USA. Toll Free Phone 800-280-6013 Phone 804-222-3094 Toll Free Fax 800-622-8839

www.drytac.com