

ReTac®

Textures LINEN

ReTac® Textures Linen can add depth and visual appeal to static, flat images with its embossed linen finish. With ReTac® on the back, eye-catching graphics printed on ReTac® Textures Linen can easily be removed and repositioned multiple times without the worry of adhesive residue being left behind. This phthalate-free film is flame resistant and can be easily applied, re-positioned and removed without surface damage or loss of adhesion.

- IDEAL FOR INTERIOR PROMOTIONS
- PERFECT FOR APPLICATION IN PUBLIC AREAS THAT REQUIRE COMPLIANCE WITH STRICT FIRE REGULATIONS
- CAN BE REMOVED WITHOUT LEAVING ADHESIVE RESIDUE

Product Code: RTCL

White
150 Phthalate-Free
micron Polymeric PVC Matte



(Eco)Solvent
Latex
UV



ReTac® ultra removable
and re-positionable
adhesive




Widths up to 1370mm



5 YEARS DURABILITY
INTERIOR AND EXTERIOR
(2 YEAR REMOVABILITY)

ADDS VISUAL INTEREST TO ANY PRINT

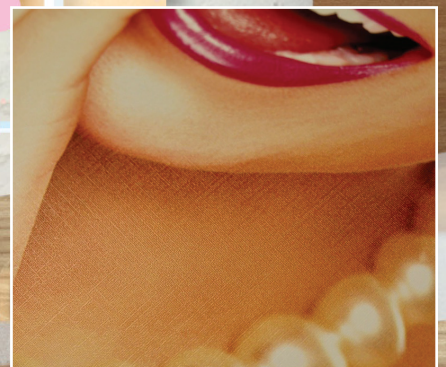

APPLICATIONS

- Smooth Flat Surfaces
- Point Of Sale Graphics
- Interior Décor
- Decals & Stickers



COLORCAPTURE
CREATE YOUR OWN WALLCOVERINGS

DRYTAC®

ADHESIVE SCIENCE

www.drytac.com

Textures LINEN

ReTac® Textures Linen is a 150µ (6 mil) printable, matte white phthalate-free polymeric PVC film with ReTac® ultra removable adhesive. It has an embossed linen like finish that adds depth and visual appeal to static, flat graphics. A subtle texture like linen draws attention to your image or message in a distinct and creative way. The film is also flame resistant according to FTMS 191, Method 5903.

- RETAC® TEXTURES IS A PHTHALATE-FREE FILM.
- IDEAL FOR WALL GRAPHICS, CUSTOM WALL MURALS, INTERIOR DÉCOR, RETAIL DISPLAYS, TRADE SHOW GRAPHICS AND SIGNAGE, AND TEXTURED LABELS.
- RETAC® TEXTURES HAS BEEN TESTED TO FTMS 191, METHOD 5903 FOR FLAME RESISTANCE, MAKING IT PERFECT FOR APPLICATION IN PUBLIC AREAS THAT REQUIRE COMPLIANCE WITH STRICT FIRE REGULATIONS, SUCH AS AIRPORTS, HOTELS AND HOSPITALS.

For more information, performance and warranty guide lines please contact your local Drytac office.

© 2018 Drytac Corporation. E&OE. All other trademarks are the property of their respective owners.

TECHNICAL SPECIFICATION

PRODUCT STRUCTURE

Film	Matte White PVC
Adhesive	ReTac® ultra removable and re-positionable adhesive technology
Release Liner	143 gsm 2 Side PE Coated, 1 Side Solventless Siliconised Fine Paper

PRODUCT CHARACTERISTIC

Film Thickness	6 mil (150µ)	7 mil (175µ)
Adhesive Layer	1 mil (25µ)	
Film/Adhesive Ratio	6:1	
UV Protection Factor	Not Applicable	
Outdoor Durability	5 year; 2 years removability	
Application Temperature	>41°F (5°C)	
Service Temperature Range	-4°F to 203°F (-20°C to 95°C)	
Flame Retardancy	FTMS 191 (According to Method 5903)	
Shelf Life	2 years	
Storage Conditions	59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity	

INSTALLATION

RECOMMENDATION

Please see Wall Graphic Installation & Removal Instructions for further details. The surface must be clean and smooth and free of defects before application.

DRYTAC®
ADHESIVE SCIENCE

Europe

Filwood Road,
Fishponds,
Bristol, BS16 3RY,
United Kingdom
bristol@drytac.com
Tel: +44 (0) 117 958 6500

Canada

105 Nuggett Court,
Brampton,
Ontario, L6T 5A9,
Canada
toronto@drytac.com
Tel: +1 800.353.2883

USA

5601 Eastport Boulevard,
Richmond,
Virginia, 23231,
USA
customerservice@drytac.com
Tel: +1 800.280.6013