

ReTac®

ChalkMate®

ReTac® ChalkMate® has a traditional black chalkboard finish that can be used with standard chalk or liquid chalk markers. It utilizes ReTac® ultra removable adhesive technology to create impromptu chalkboard walls that are easy to apply, re-position and remove without surface damage. It can be installed on most smooth surfaces. A second version is available that features a permanent, pressure sensitive acrylic adhesive, making it ideal for fixture applications. Both versions can also be used to make unique, custom chalkboard decals from die cut shapes or designs.

- IDEAL FOR INDOOR CHALKBOARDS
- SUITABLE FOR SCHOOLS
- CAN BE EASILY REPOSITIONED & REMOVED

5
mil

Black
Chalkboard
Monomeric PVC



Matte



Printers with
white ink



ReTac® ultra removable
and re-positionable
adhesive



Widths up to 60 in

DURABILITY
5
YEARS

INTERIOR

DURABILITY
3
YEARS


EXTERIOR

USE STANDARD CHALK OR LIQUID CHALK MARKERS

BBQ Grill Menu

Swiches	4.75
cken	6.20
tes	12.85
ubs	14.60
s	3.15
a Carte	21.45

• All Natural •

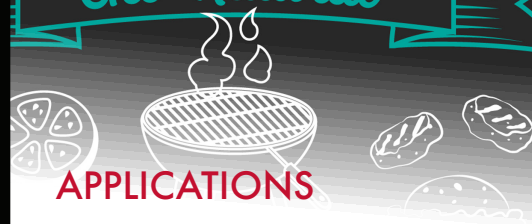

APPLICATIONS

CHALKBOARDS

RETAIL NOTICE BOARDS

MENUS & PRICE LISTS



DRYTAC®
ADHESIVE SCIENCE

www.drytac.com

ReTac®

ChalkMate®

ReTac® ChalkMate® is a 125µ (5 mil) durable, printable monomeric PVC film with a traditional black chalkboard finish and ReTac® ultra removable adhesive. ReTac® ChalkMate® can be easily applied, re-positioned and removed without surface damage or loss of adhesion. It works well when creating chalkboard walls or making unique, custom chalkboard decals from die cut shapes or designs. Installs on most smooth surfaces.

- IDEAL FOR IN STORE PROMOTIONS
- SUITABLE FOR INTERIOR & EXTERIOR USE, PLEASE NOTE WEATHER CONDITIONS MAY AFFECT YOUR CHALK.
- RETAC® CHALKMATE® IS FIRE RATED, MAKING IT PERFECT FOR APPLICATIONS IN PUBLIC AREAS THAT REQUIRE COMPLIANCE WITH STRICT FIRE REGULATIONS, SUCH AS AIRPORTS, HOTELS AND HOSPITALS.

Please Note: Plasticizer migration from some PVC substrates could cause adhesive residue being left behind upon removal

**For more information,
performance and warranty guide
lines please contact your local
Drytac office.**

© 2025 Drytac Corporation. E&OE.
All other trademarks are the property
of their respective owners.

TECHNICAL SPECIFICATION

PRODUCT STRUCTURE

Film	Black Monomeric PVC
Adhesive	ReTac® ultra removable and re-positionable adhesive
Release Liner	143 gsm 2 Side PE Coated, 1 Side Solventless Siliconised Fine Paper

PRODUCT CHARACTERISTICS

Film Thickness	5 mil (125µ)
Adhesive Layer	0.8 mil (20µ)
Film/Adhesive Ratio	5:0.8
UV Protection Factor	Not Applicable
Outdoor Durability	3 Years
Application Temperature	>41°F (5°C)
Service Temperature Range	40°F to 120°F (4.4°C to 48.9°C)
Fire Ratings	Class 0 (BS 476 - Part 6 & 7) Class 1 or A (ASTM E-84)
Shelf Life	2 years
Storage Conditions	59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity

DRYTAC®
ADHESIVE SCIENCE

Europe

Filwood Road,
Fishponds,
Bristol, BS16 3RY,
United Kingdom
bristol@drytac.com
Tel: +44 (0) 117 958 6500

Canada

30 Driver Road,
Brampton,
Ontario, L6T 5V2,
Canada
toronto@drytac.com
Tel: +1 800.353.2883

USA

5401-B Eubank Road,
Sandston,
Virginia, 23150,
USA
customerservice@drytac.com
Tel: +1 800.280.6013

www.drytac.com