

ReTac® WipeErase®

ReTac® WipeErase® is a white dry erase film with a white gloss, hard coat finish with ReTac® ultra removable adhesive. ReTac® WipeErase® has a chemical and scratch-resistant UV hard coat and a clear gloss surface that safeguards against ghosting or staining from ink. The chemical and scratch-resistant clear gloss surface of ReTac® WipeErase® safeguards against these concerns. When compared to other high quality dry erase boards, ReTac® WipeErase® is remarkably easy to erase. Its anti-graffiti properties also allow for easy removal of permanent marker with rubbing alcohol.

- 10-YEAR WARRANTY GUARANTEEING ITS ERASABILITY PROPERTIES; NO GHOSTING OR SCRATCHING
- CAN BE USED TO CREATE HIGH QUALITY, REMOVABLE DRY ERASE GRAPHICS THAT CAN STICK TO VIRTUALLY ANY SMOOTH SURFACE.

6
mil

White PP
Dry Erase
Film



Gloss



ReTac®
Ultra Removable &
Repositionable Adhesive



UV




Widths up to 60 in

10
YEARS DURABILITY

INTERIOR

(2 YEAR REMOVABILITY)

CREATE WHITE BOARDS THAT EASILY ERASE

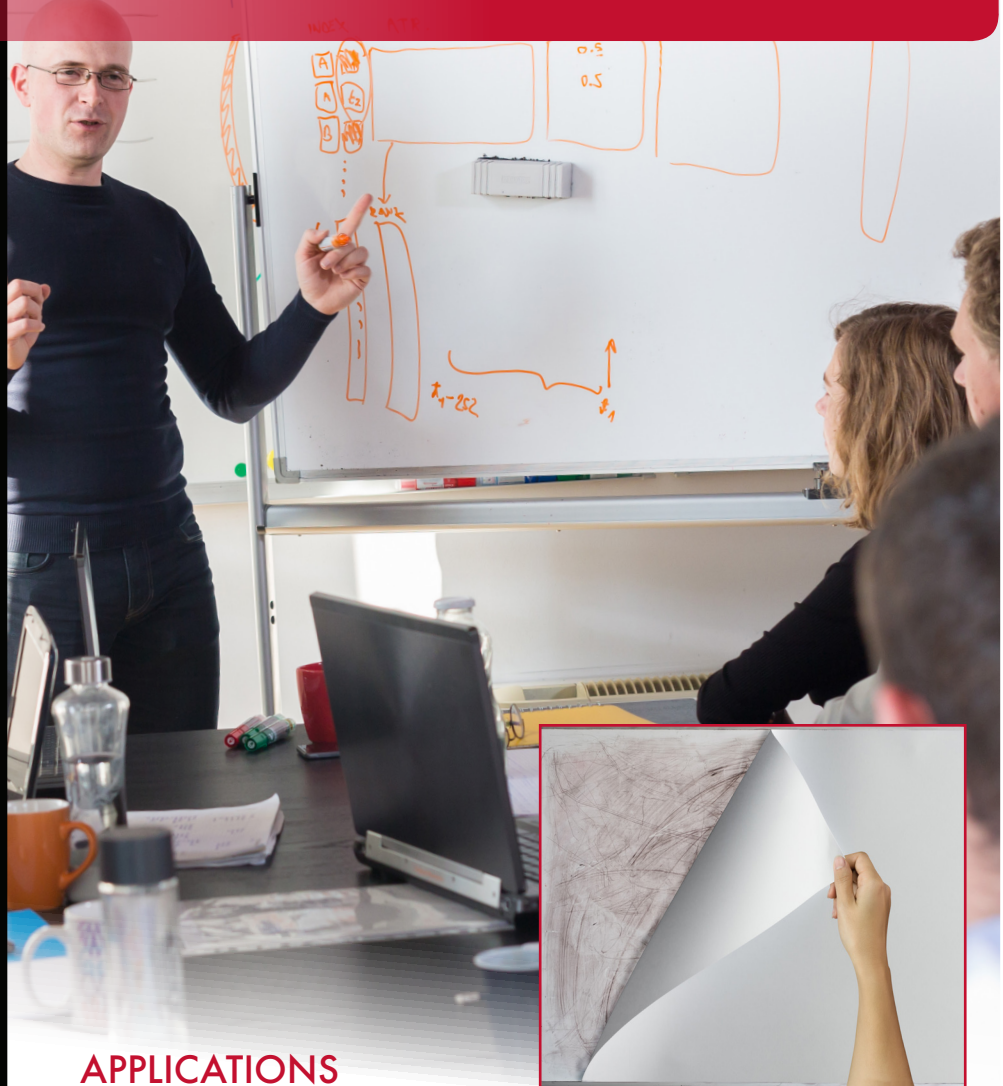

APPLICATIONS

OFFICE
HOME
SCHOOL
HOSPITAL



DRYTAC®
ADHESIVE SCIENCE

www.drytac.com

ReTac® WipeErase®

Retac® WipeErase® is a 6 mil (150µ) durable high quality dry erase coated PP film with a white gloss, hard coat finish and ReTac® ultra removable adhesive protected by a PE coated Kraft release paper siliconized on the release side. Possessing anti-graffiti qualities, it offers a truly superior combination of resistance against scratches, abrasion, water, solvents, stains, and chemicals. Retac® WipeErase® is dimensionally stable and easy to handle.

- CAN BE WRITTEN ON WITH STANDARD DRY ERASE MARKERS
- IDEAL FOR USE IN CHILDREN'S ROOMS, SCHOOLS, DAYCARE CENTERS, OFFICES, HOSPITALS, DORMS, AND GROCERY STORES AS WELL AS ON RESTAURANT/PUB MENUS
- CAN BE USED TO REFRESH OLD DRY ERASE BOARDS OR SURFACES.

STAIN RESISTANCE

The following agents had no effect on ReTac® WipeErase® after being in contact overnight and wiped off with mild detergent or glass cleaner.

Ethyl alcohol	Milk
Isopropyl alcohol	Vinegar
Hydrogen peroxide	Methyl ethyl Ketone
Naphtha	Grape juice
Lipstick	Rit dye
Blue ink	Mercurochrome
5% soap solution	Ball point pen ink
5% detergent solution	Felt pen

Please Note: Plasticizer migration from some PVC substrates could cause adhesive residue being left behind upon removal. After two years, removal will become difficult.

For more information, performance and warranty guidelines please contact your local Drytac office.

© 2018 Drytac Corporation. E&OE.
All other trademarks are the property of their respective owners.

TECHNICAL SPECIFICATION

PRODUCT STRUCTURE

Film	White Dry Erase coated PP
Adhesive	ReTac® ultra removable and re-positionable adhesive technology
Release Liner	78# 2 Side PE Coated 1 Side Siliconized Kraft Paper

PRODUCT CHARACTERISTIC

Film Thickness	6 mil (150µ) 7 mil (175µ)
Adhesive Layer	1 mil (25µ)
Film/Adhesive Ratio	6:1
Outdoor Durability	Not Applicable
Fire Rating (ASTM E-84)	Class A or Class 0
Application Temperature	>41°F (5°C)
Service Temperature Range	40°F to 120°F (4.4°C to 48.9°C)
Shelf Life	1 year
Storage Conditions	59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity

TECHNICAL PERFORMANCE

Characteristic	Property	Result
Gloss	60° using BYK Gardner/Micro-TRI Gloss Test Method	100%
Durability	Scratch resistance - Using Hoffman Scratch Test	700
	Hardness - Using Test ASTM D3363-74	7H
Wearability	Abrasion resistance - Using Taber Abrasion/500 g-CS-10 Wheel	500+cycles
	Wear resistance - Using BYK Gardner Sled	5000+cycles

DRYTAC®
ADHESIVE SCIENCE

Europe

Filwood Road,
Fishponds,
Bristol, BS16 3RY,
United Kingdom
bristol@drytac.com
Tel: +44 (0) 117 958 6500

Canada

105 Nuggett Court,
Brampton,
Ontario, L6T 5A9,
Canada
toronto@drytac.com
Tel: +1 800.353.2883

USA

5601 Eastport Boulevard,
Richmond,
Virginia, 23231,
USA
customerservice@drytac.com
Tel: +1 800.280.6013

www.drytac.com

ReTac® WipeErase®

ReTac® WipeErase® has a writing surface that is built to last and includes a 10-year warranty guaranteeing its erasability properties. Be sure to follow these care and maintenance instructions to ensure your writing surface looks fresh and new for years to come.

For more information,
performance and warranty guide
lines please contact your local
Drytac office.

© 2018 Drytac Corporation. E&OE.
All other trademarks are the property
of their respective owners.

TECHNICAL SPECIFICATION

Writing Surface

- Use dry erase markers for any written text that you desire to be temporary and which can be wiped off easily with a dry, soft cloth.
- Use permanent markers for any writing or graph lines which you desire to be longer lasting and which can be removed with a solvent based cleaner.
- Press firmly when erasing using a circular motion.
- Periodic cleaning (as needed basis), rinse the entire writing surface with soapy water and then dry with a soft cloth.
- To remove any permanent marker ink, use a solvent such as acetone, diluted rubbing alcohol. You can also trace over any areas of permanent marker ink with a dry erase marker and dry erase as usual.

Erasers

- Please remember to clean cloths/erasers on a regular basis. A dirty cloth/eraser will leave ink residue on the writing surface. Microfiber cloths are preferred over felt erasers because they can be machine laundered making them easier to keep clean.

- Either clean or replace cloths/erasers as they become dirty. A dirty felt eraser may be cleaned with rubbing alcohol, acetone or warm soapy water.

Markers

- Use Low Odor Dry Erase markers from a reputable brand. It is best to store markers horizontally so that the felt tips do not dry out. Do not use markers with dried out tips, since they could potentially dent your writing surface.

Caution:

- ReTac WipeErase is scratch resistant, but not scratch proof.
- Keep any sharp objects such as pens, pointers, metal magnets, rings/jewelry, knives, scrapers, etc. away from your writing surface.
- Do not drag magnets across your writing surface.
- Do not use felt erasers, scouring pads or other harsh cleaners on your writing surface.
- Do not use any abrasive material or fingernails to remove tape or stickers.

DRYTAC®
ADHESIVE SCIENCE

Europe

Filwood Road,
Fishponds,
Bristol, BS16 3RY,
United Kingdom
bristol@drytac.com
Tel: +44 (0) 117 958 6500

Canada

105 Nuggett Court,
Brampton,
Ontario, L6T 5A9,
Canada
toronto@drytac.com
Tel: +1 800.353.2883

USA

5601 Eastport Boulevard,
Richmond,
Virginia, 23231,
USA
customerservice@drytac.com
Tel: +1 800.280.6013

www.drytac.com