

# SpotOn®

## EASY BUBBLE FREE APPLICATION

SpotOn® has a unique dot pattern removable adhesive that is virtually undetectable, but allows graphics to be installed with minimal effort, remain in place for the duration of the application, and removed with ease. The film's adhesive allows for easy, bubble-free application of vibrant graphics to a wide range of substrates without the need for tools or wet installation. Available in clear matte, white matte and white gloss finishes. SpotOn® is commonly used for window graphics but can also be used for short-term indoor applications such as wall graphics, tradeshow graphics or retail graphics that require seasonal change out.

- IDEAL FOR INDOOR OR SHORT-TERM OUTDOOR PROMOTIONS
- EASY TOOL & BUBBLE FREE APPLICATION
- CAN BE REMOVED EASILY WITHIN 12 MONTHS

Product Code: SPOG, SPOM, SPOC

**100** Clear or White  
micron Monomeric  
PVC



(Eco) Solvent  
Latex  
UV



DOT Pattern  
Removable  
Adhesive




Widths up to 1370mm



3 YEARS DURABILITY  
INTERIOR



6 MONTHS DURABILITY  
EXTERIOR

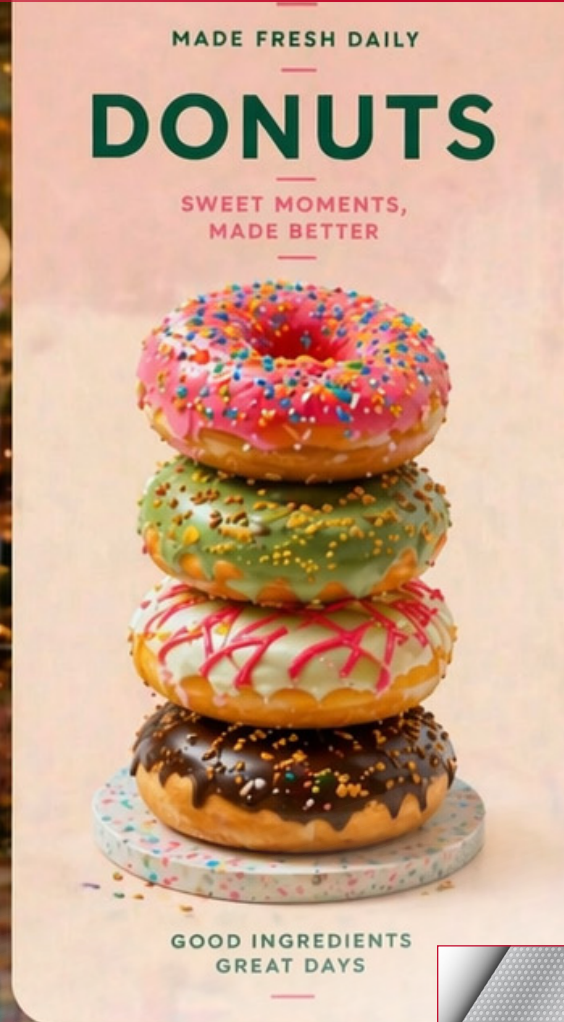

## APPLICATIONS

Indoor Signage

Retail Promotions

Window Graphics

# DRYTAC®

## ADHESIVE SCIENCE

[www.drytac.com](http://www.drytac.com)

SpotOn® is a 100µ (4 mil) printable monomeric PVC film with a dot pattern, removable pressure sensitive polyacrylate adhesive. The adhesive is protected by a single-sided, siliconised clay coated Kraft release liner. This high quality, ink receptive printable vinyl was specifically developed for easy, bubble-free application of vibrant graphics to a wide range of substrates. SpotOn® is available in clear matte, white matte and white gloss finishes.

- PROP 65 COMPLIANT
- EASY TOOL & BUBBLE FREE APPLICATION
- CAN BE REMOVED EASILY WITHIN 12 MONTHS

### INSTALLATION RECOMMENDATION

Please see SpotOn® installation instructions for further details. The surface must be clean and smooth and free of defects before application.

For more information, performance and warranty guide lines please contact your local Drytac office.

© 2026 Drytac Corporation. E&OE. All other trademarks are the property of their respective owners.

### PRODUCT STRUCTURE

<b>Film</b>	White Matte, White Gloss, or Clear Matte Monomeric PVC
<b>Adhesive</b>	Dot-Pattern Removable Polyacrylate
<b>Release Liner</b>	140 gsm 1 Side Siliconised PE Coated Kraft

### PRODUCT CHARACTERISTIC

<b>Film Thickness</b>	4 mil (100µ)	} 4.5 mil (113µ)
<b>Adhesive Layer</b>	0.5 mil (13µ)	
<b>Film/Adhesive Ratio</b>	4:0.5	
<b>UV Protection Factor</b>	Not Applicable	
<b>Outdoor Durability</b>	Short-Term	
<b>Application Temperature</b>	>41°F (5°C)	
<b>Service Temperature Range</b>	-4°F to 149°F (-20°C to 65°C)	
<b>Fire Rating</b>	B1 (DIN 4102-1) PASS (CAN/ULC-S102) Class B (EN 13501-1)	
<b>Shelf Life</b>	1 year	
<b>Storage Conditions</b>	64°F to 77°F (18°C to 25°C); 40 - 65% Relative Humidity	

# DRYTAC®

## ADHESIVE SCIENCE

#### Europe

Filwood Road,  
Fishponds,  
Bristol, BS16 3RY,  
United Kingdom  
[bristol@drytac.com](mailto:bristol@drytac.com)  
Tel: +44 (0) 117 958 6500

#### Canada

30 Driver Road,  
Brampton,  
Ontario, L6T 5V2,  
Canada  
[toronto@drytac.com](mailto:toronto@drytac.com)  
Tel: +1 800.353.2883

#### USA

5401-B Eubank Road,  
Sandston,  
Virginia, 23150,  
USA  
[customerservice@drytac.com](mailto:customerservice@drytac.com)  
Tel: +1 800.280.6013