

Emerytex®

White 200

ONE PART FLOOR GRAPHIC SOLUTION

Emerytex® White 200 is designed for eye-catching textured short-term graphics that instantly attract attention. Its removable gray, non-damaging adhesive makes it ideal for broad range of general signage applications, including countertop decals, posters, retail displays and exhibition graphics.

- IDEAL FOR COUNTERTOP GRAPHICS, SUCH AS QR CODES, ADVERTISING OR BRAND PROMOTION.
- NO NEED TO LAMINATE – THIS SAVES TIME, LABOR AND MONEY! EMERYTEX WHITE 200'S 8 MIL THICKNESS AND TEXTURED SCUFF-RESISTANT SURFACE ELIMINATES THE NEED TO LAMINATE.

Part Number: PFTE

8.0
mil

Textured White
Monomeric
PVC



Matte



(Eco) Solvent
Latex
UV




Removable
Gray Acrylic
(Pressure Sensitive)



Widths up to 54 in



MONTHS DURABILITY
UP TO
9
MONTHS
INTERIOR*

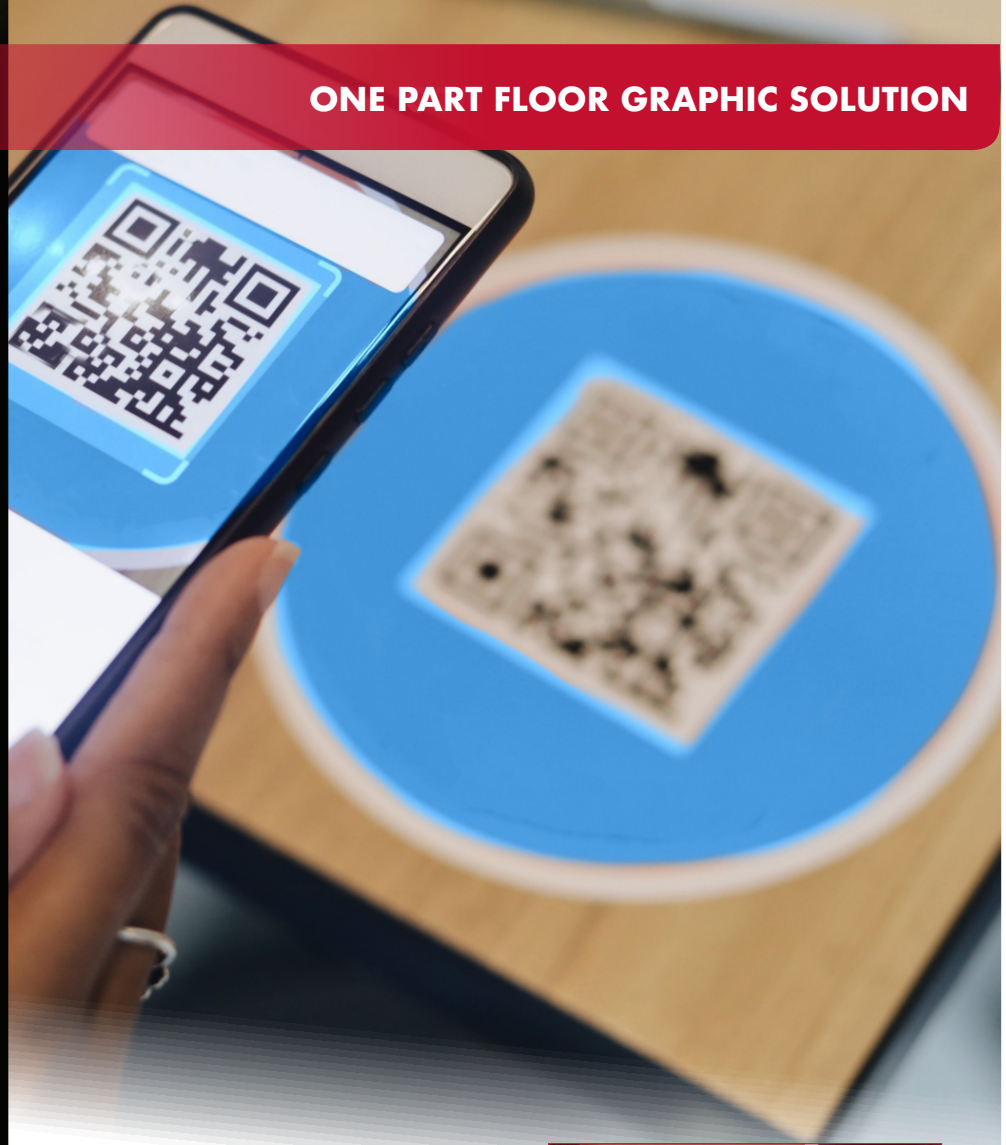

APPLICATIONS

COUNTERTOPS

POSTERS

POP DISPLAYS

EXHIBITION GRAPHICS



DRYTAC®

ADHESIVE SCIENCE

www.drytac.com

White 200

Emerytex® White 200 is an 8 mil (200µ) monomeric soft calendared white PVC film with a matte pebble textured finish, coated on one side with a pressure sensitive removable acrylic adhesive that is protected by a bleached Kraft release paper coated on both sides with PE and siliconized on the release side. The textured emboss on the film provides excellent scuff-resistance.

- IDEAL FOR INDOOR OR OUTDOOR GRAPHICS
- FIRE RATED MAKING IT IDEAL FOR PUBLIC ENVIRONMENTS, SUCH AS RETAIL, HOSPITALITY, EDUCATION.

For more information, performance and warranty guidelines please contact your local Drytac office.

© 2020 Drytac Corporation. E&OE. All other trademarks are the property of their respective owners.

TECHNICAL SPECIFICATION

PRODUCT STRUCTURE

Film	Matte White Pebble Textured Monomeric Soft Calendared PVC
Adhesive	Removable Gray Acrylic (Pressure Sensitive)
Release Liner	2 Side PE Coated, 1 Side Siliconised Kraft

PRODUCT CHARACTERISTICS

Film Thickness	8 mil (200µ) 9.4 mil (235µ)
Adhesive Layer	1.4 mil (35µ)
Fire Rating	Class 1 or Class A (ASTM E84) PASS (CAN/ULC-S102)
Application Temperature	>-4°F (-20°C)
Service Temperature Range	-58°F to 212°F (-50°C to 100°C)
Shelf Life	1 year
Storage Conditions	59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity

DRYTAC
ADHESIVE SCIENCE

Europe

Filwood Road,
Fishponds,
Bristol, BS16 3RY,
United Kingdom
bristol@drytac.com
Tel: +44 (0) 117 958 6500

Canada

30 Driver Road,
Brampton,
Ontario, L6T 5V2,
Canada
toronto@drytac.com
Tel: +1 800.353.2883

USA

5401-B Eubank Road,
Sandston,
Virginia, 23150,
USA
customerservice@drytac.com
Tel: +1 800.280.6013