

SpotOn®

Duo

SpotOn Duo is a versatile, double-sided mounting adhesive designed to help print providers create stunning retail graphics with ease. Featuring a permanent adhesive on one side and Drytac's signature removable SpotOn dot-pattern adhesive on the other, this innovative solution transforms non-adhesive backed graphics into peel-and-stick displays that are simple to apply and reposition.

Perfect for synthetic blockout papers or cardstocks printed on both sides, SpotOn Duo excels in dynamic push/pull messaging for storefront glass displays and other retail applications. Its unique construction ensures seamless application and removal, making it ideal for both professional and DIY installations.

Product Code: SPOD



Clear Permanent Acrylic
Pressure-Sensitive
Adhesive

0.9
mil

Clear
Polyester
(PET)



Clear Removable
SpotOn Dot Pattern
Adhesive



Widths up to 51 in

YEARS DURABILITY
3 INTERIOR

MONTHS DURABILITY
6 EXTERIOR

CREATE EASY TWO-WAY WINDOW GRAPHICS




APPLICATIONS

Two-Sided Window Graphics

Push/Pull

Smooth Surfaces

Point Of Sale Graphics

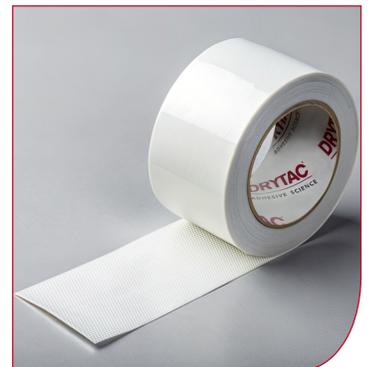

DRYTAC®
ADHESIVE SCIENCE

www.drytac.com

SpotOn®

Duo

SpotOn® Duo is a unique, clear double-sided mounting adhesive film engineered for hassle-free, bubble-free installation.

This self-wound construction features a 0.8 mil (21µ) permanent acrylic pressure sensitive adhesive on one side and a 0.5 mil (13µ) layer of SpotOn®'s signature removable dot pattern adhesive on the other—delivering strong adhesion to graphics and easy, clean removability from application surfaces. Built on a 0.9 mil (23µ) PET carrier, SpotOn® Duo is ideal for mounting graphics to smooth surfaces where repositionability and ease of installation are essential.

For more information, performance and warranty guidelines please contact your local Drytac office.

© 2025 Drytac Corporation. E&OE. All other trademarks are the property of their respective owners.

TECHNICAL SPECIFICATION

PRODUCT STRUCTURE

| | |
|----------------------|--|
| Adhesive | Permanent Acrylic (Pressure Sensitive) |
| Film | Clear PET |
| Adhesive | SpotOn® Dot Pattern Removable Adhesive |
| Release Liner | 100g 2 side PE Kraft |

PRODUCT CHARACTERISTICS

| | |
|---|---|
| Adhesive Layer (Permanent) | 0.8 mil (21µ) |
| Film Thickness | 0.9 mil (23µ) |
| Adhesive Layer (Dot Pattern Removable) | 0.5 mil (13µ) |
| Outdoor Durability | 2 Years |
| Application Temperature | 41°F (5°C) |
| Service Temperature Range | 41°F to 140°F (5°C to 60°C) |
| Shelf Life | 2 Years |
| Storage Conditions | 59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity |

PROCESS SETTINGS

| Equipment Type & Temperature | Speed |
|---|--|
| Roller Laminator Room temperature to 104°F (40°C) | 1 ft to 8 ft (0.3m to 2.5m) per minute |
| Press | Not recommended |

DRYTAC®

ADHESIVE SCIENCE

Europe

Filwood Road,
Fishponds,
Bristol, BS16 3RY,
United Kingdom
bristol@drytac.com
Tel: +44 (0) 117 958 6500

Canada

30 Driver Road,
Brampton,
Ontario, L6T 5V2,
Canada
toronto@drytac.com
Tel: +1 800.353.2883

USA

5401 B Eubank Road,
Sandston,
Virginia, 23150,
USA
customerservice@drytac.com
Tel: +1 800.280.6013

www.drytac.com