

SpotOn®

Duo

SpotOn Duo is a versatile, double-sided mounting adhesive designed to help print providers create stunning retail graphics with ease. Featuring a permanent adhesive on one side and Drytac's signature removable SpotOn dot-pattern adhesive on the other, this innovative solution transforms non-adhesive backed graphics into peel-and-stick displays that are simple to apply and reposition.

Perfect for synthetic blackout papers or cardstocks printed on both sides, SpotOn Duo excels in dynamic push/pull messaging for storefront glass displays and other retail applications. Its unique construction ensures seamless application and removal, making it ideal for both professional and DIY installations.

Product Code: SPOD



Clear Permanent Acrylic
Pressure-Sensitive
Adhesive

23

micron

Clear
Polyester
(PET)



Clear Removable
SpotOn Dot Pattern
Adhesive



Widths up to 1300 mm



INTERIOR



EXTERIOR

CREATE EASY TWO-WAY WINDOW GRAPHICS




APPLICATIONS

Two-Sided Window Graphics

Push/Pull

Smooth Surfaces

Point Of Sale Graphics

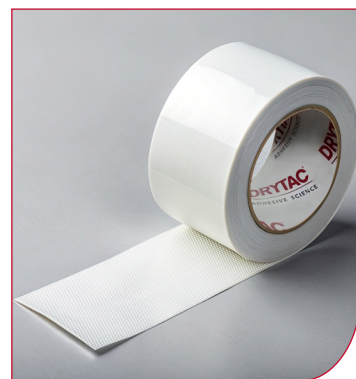

DRYTAC®

ADHESIVE SCIENCE

www.drytac.com

SpotOn®

Duo

SpotOn® Duo is a unique, clear double-sided mounting adhesive film engineered for hassle-free, bubble-free installation.

This self-wound construction features a 0.8 mil (21µ) permanent acrylic pressure sensitive adhesive on one side and a 0.5 mil (13µ) layer of SpotOn®'s signature removable dot pattern adhesive on the other—delivering strong adhesion to graphics and easy, clean removability from application surfaces. Built on a 0.9 mil (23µ) PET carrier, SpotOn® Duo is ideal for mounting graphics to smooth surfaces where repositionability and ease of installation are essential.

For more information, performance and warranty guidelines please contact your local Drytac office.

© 2025 Drytac Corporation. E&OE.
All other trademarks are the property of their respective owners.

0425

TECHNICAL SPECIFICATION

PRODUCT STRUCTURE

Adhesive	Permanent Acrylic (Pressure Sensitive)
Film	Clear PET
Adhesive	SpotOn® Dot Pattern Removable Adhesive
Release Liner	100g 2 side PE Kraft

PRODUCT CHARACTERISTICS

Adhesive Layer (Permanent)	0.8 mil (21µ)
Film Thickness	0.9 mil (23µ)
Adhesive Layer (Dot Pattern Removable)	0.5 mil (13µ)
Outdoor Durability	2 Years
Application Temperature	41°F (5°C)
Service Temperature Range	41°F to 140°F (5°C to 60°C)
Shelf Life	2 Years
Storage Conditions	59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity

PROCESS SETTINGS

Equipment Type & Temperature	Speed
Roller Laminator Room temperature to 104°F (40°C)	1 ft to 8 ft (0.3m to 2.5m) per minute
Press	Not recommended

DRYTAC®
ADHESIVE SCIENCE

Europe

Filwood Road,
Fishponds,
Bristol, BS16 3RY,
United Kingdom
bristol@drytac.com
Tel: +44 (0) 117 958 6500

Canada

30 Driver Road,
Brampton,
Ontario, L6T 5V2,
Canada
toronto@drytac.com
Tel: +1 800.353.2883

USA

5401-B Eubank Road,
Sandston,
Virginia, 23150,
USA
customerservice@drytac.com
Tel: +1 800.280.6013

www.drytac.com

APPLICATIONS

- Temporary sales signage
- Presentations
- POP & Event signage
- In-Store signage
- Advertisements

Product Code: SPSF



Drytac
Easy Green
Solution

120
micron

White
Matte
PP



Matte



Aqueous
Latex
UV



Removable
DOT Pattern Polyacrylate
Adhesive



Widths up to 1370mm



INTERIOR



EXTERIOR

**For more technical information,
please refer to www.drytac.com.



DRYTAC®
ADHESIVE SCIENCE