

# Protac™

## Extreme

Protac™ Extreme is a 6 mil (150 $\mu$ ) textured, non-PVC PET laminating film designed for durability and long-lasting performance. Its tough, scratch-resistant surface provides excellent protection against wear and tear, while its chemical-resistant finish ensures reliable performance in demanding environments.

Ideal for both interior and exterior applications, Protac™ Extreme delivers up to 15 years of interior durability and 5 years of exterior durability, making it a premium choice for projects requiring long-term protection and high-quality aesthetics. Its textured finish adds depth while maintaining clarity, ensuring colours remain vibrant and true.

Product Code: PEX

**6.0** mil  Clear Textured Polyester (PET)  Matte



Not a  
Printable  
Film



Clear Permanent  
Solvent Acrylic  
Adhesive




Widths up to 47 in



INTERIOR



INTERIOR

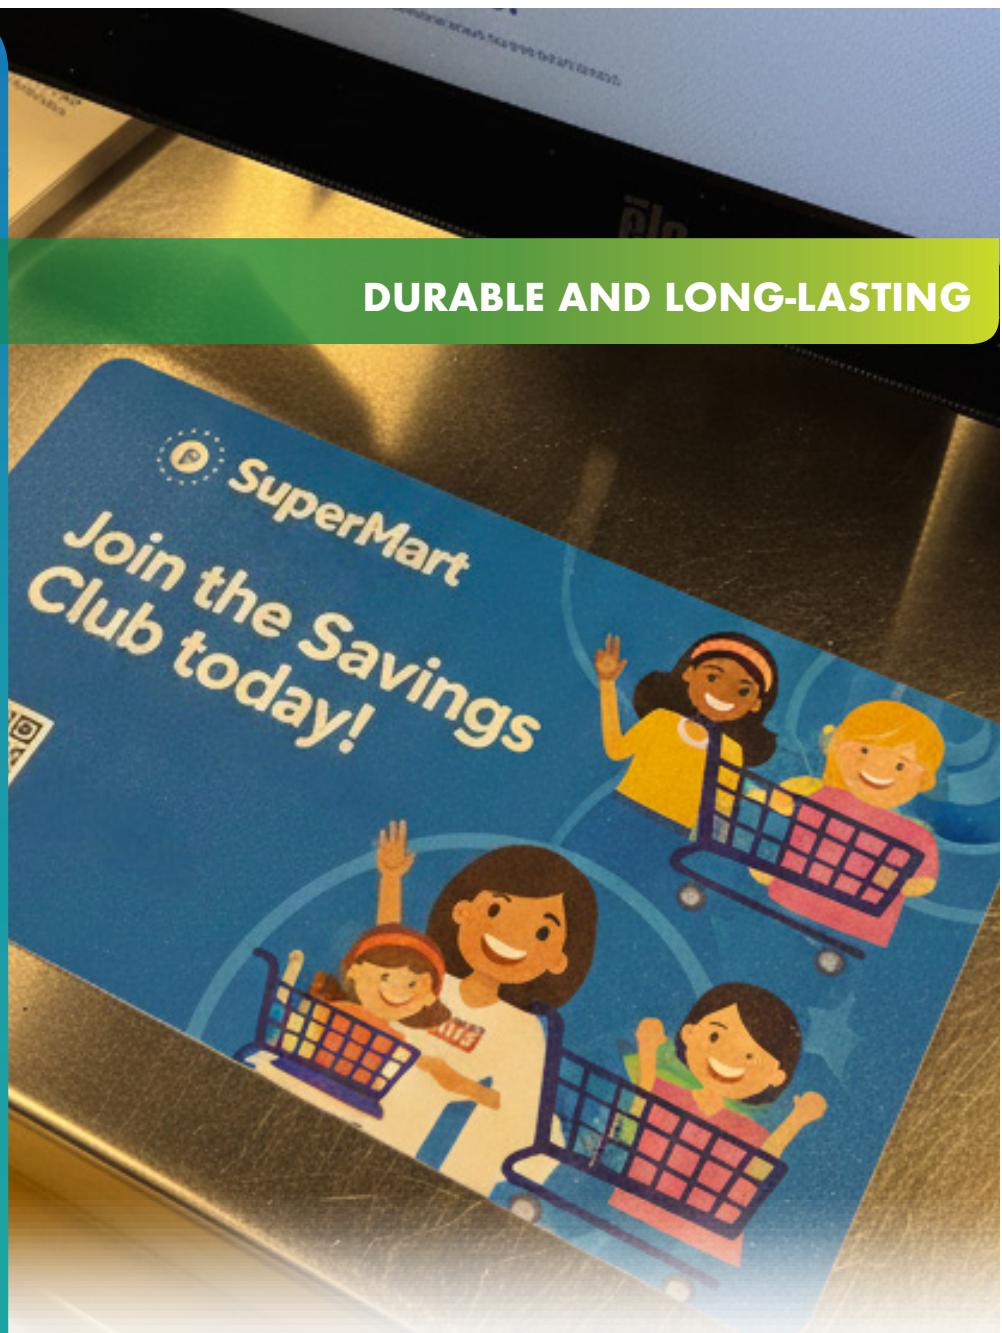

## DURABLE AND LONG-LASTING

### APPLICATIONS

POINT-OF-SALE

COUNTERTOP GRAPHICS

DRY ERASE SURFACES

SURFACE PROTECTION



**DRYTAC®**  
**ZERO**®

# Protac™

## Extreme

Protac™ Extreme is a 6 mil (150 $\mu$ ) textured polyester (PET) laminating film featuring a durable anti-microbial hard coating. Applications include matte dry erase film and surface protection film. Designed for high-touch environments such as countertop graphics at point of sale, it delivers enhanced durability and resistance to frequent handling.

The reverse side of the film features a pressure-sensitive acrylic adhesive, protected by a 100 gsm, two-sided PE-coated kraft release liner. Engineered to withstand daily cleaning methods, Protac™ Extreme offers excellent scratch and chemical resistance, making it ideal for demanding, high-traffic applications.

- NON-PVC, ENVIRONMENTALLY CONSCIOUS CONSTRUCTION
- ANTI-MICROBIAL HARD COATING FOR HIGH-TOUCH ENVIRONMENTS
- EXCELLENT SCRATCH AND CHEMICAL RESISTANCE
- WITHSTANDS FREQUENT CLEANING AND DAILY WEAR

For more information, performance and warranty guidelines please contact your local Drytac office.

© 2026 Drytac Corporation. E&OE.  
All other trademarks are the property of their respective owners.

## TECHNICAL SPECIFICATIONS

### PRODUCT STRUCTURE

#### Film

Clear Textured Polyester (PET) with Anti-Microbial Hard Coating

#### Adhesive

Clear Permanent Acrylic (Pressure Sensitive)

#### Release Liner

130gsm 2 side PE Liner with Bubble-Free Technology

### PRODUCT CHARACTERISTICS

#### Film Thickness

6.0 mil (150 $\mu$ )

#### Adhesive Layer

1.0 mil (25 $\mu$ )

#### Outdoor Durability

5 Years

#### UV Protection

Yes

#### Slip Rating

Moderate Slip Potential; PTV Wet: 29 (EN 13036-4)

#### Antimicrobial Properties

15 Year Antimicrobial Protection; (JIS Z2801)

#### Application Temperature

>41°F (5°C)

#### Service Temperature Range

5°F to 248°F (-15°C to 120°C)

#### Shelf Life

2 Years

#### Storage Conditions

59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity



#### Europe

Filwood Road,  
Fishponds,  
Bristol, BS16 3RY,  
United Kingdom  
[bristol@drytac.com](mailto:bristol@drytac.com)  
Tel: +44 (0) 117 958 6500

#### Canada

30 Driver Road,  
Brampton,  
Ontario, L6T 5V2,  
Canada  
[toronto@drytac.com](mailto:toronto@drytac.com)  
Tel: +1 800.353.2883

#### USA

5401-B Eubank Road,  
Sandston,  
Virginia, 23150,  
USA  
[customerservice@drytac.com](mailto:customerservice@drytac.com)  
Tel: +1 800.280.6013