

Protac™

Extreme

Protac™ Extreme is a 6 mil (150 μ) textured, non-PVC PET laminating film designed for durability and long-lasting performance. Its tough, scratch-resistant surface provides excellent protection against wear and tear, while its chemical-resistant finish ensures reliable performance in demanding environments. Ideal for both interior and exterior applications, Protac™ Extreme delivers up to 15 years of interior durability and 5 years of exterior durability, making it a premium choice for projects requiring long-term protection and high-quality aesthetics. Its textured finish adds depth while maintaining clarity, ensuring colours remain vibrant and true.

Product Code: PEX

150 micron Clear Textured Polyester (PET)



Matte



Not a
Printable
Film



Clear Solvent
Acrylic Adhesive



Widths up to 1200mm



INTERIOR



INTERIOR

DURABLE AND LONG-LASTING



APPLICATIONS

POINT-OF-SALE


COUNTERTOP GRAPHICS

DRY ERASE SURFACES

SURFACE PROTECTION

DAILY TASKS

- Check emails
- Client call
- Project review

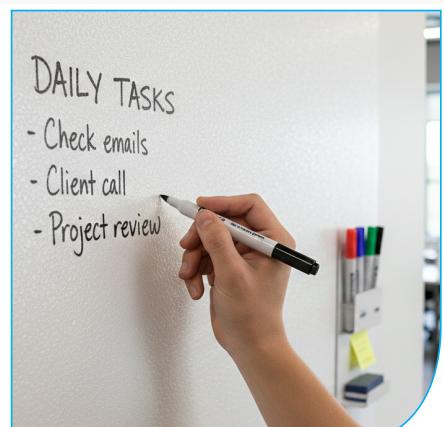

DRYTAC®
ZERO®

Protac™

Extreme

Protac™ Extreme is a 6 mil (150 μ) textured polyester (PET) laminating film featuring a durable anti-microbial hard coating. Applications include matte dry erase film and surface protection film. Designed for high-touch environments such as countertop graphics at point of sale, it delivers enhanced durability and resistance to frequent handling.

The reverse side of the film features a pressure-sensitive acrylic adhesive, protected by a 100 gsm, two-sided PE-coated kraft release liner. Engineered to withstand daily cleaning methods, Protac™ Extreme offers excellent scratch and chemical resistance, making it ideal for demanding, high-traffic applications.

- NON-PVC, ENVIRONMENTALLY CONSCIOUS CONSTRUCTION
- ANTI-MICROBIAL HARD COATING FOR HIGH-TOUCH ENVIRONMENTS
- EXCELLENT SCRATCH AND CHEMICAL RESISTANCE
- WITHSTANDS FREQUENT CLEANING AND DAILY WEAR

For more information, performance and warranty guidelines please contact your local Drytac office.

© 2026 Drytac Corporation. E&OE.
All other trademarks are the property of their respective owners.

TECHNICAL SPECIFICATION

PRODUCT STRUCTURE

Film

Clear Textured Polyester (PET) with Anti-Microbial Hard Coating

Adhesive

Clear Permanent Acrylic (Pressure Sensitive)

Release Liner

130gsm 2 side PE Liner with Bubble-Free Technology

PRODUCT CHARACTERISTICS

Film Thickness

6.0 mil (150 μ)

Adhesive Layer

1.0 mil (25 μ)

Outdoor Durability

5 Years

UV Protection

Yes

Slip Rating

Moderate Slip Potential; PTV Wet: 29 (EN 13036-4)

Antimicrobial Properties

15 Year Antimicrobial Protection; (JIS Z2801)

Application Temperature

>41°F (5°C)

Service Temperature Range

5°F to 248°F (-15°C to 120°C)

Shelf Life

2 Years

Storage Conditions

59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity



Europe

Filwood Road,
Fishponds,
Bristol, BS16 3RY,
United Kingdom
bristol@drytac.com
Tel: +44 (0) 117 958 6500

Canada

30 Driver Road,
Brampton,
Ontario, L6T 5V2,
Canada
toronto@drytac.com
Tel: +1 800.353.2883

USA

5401-B Eubank Road,
Sandston,
Virginia, 23150,
USA
customerservice@drytac.com
Tel: +1 800.280.6013